

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

B21J 15/04, 15/06

A1

(11) International Publication Number:

WO 95/05255

(43) International Publication Date:

23 February 1995 (23.02.95)

(21) International Application Number: PCT/US94/09094

(22) International Filing Date: 11 August 1994 (11.08.94)

(30) Priority Data:

08/106,439

16 August 1993 (16.08.93)

US

(71)(72) Applicants and Inventors: COURIAN, Curtis, C.  
[US/US]; 13675 Winstanley Way, San Diego, CA 92130  
(US). COURIAN, Kenneth, J. [US/US]; 3536 Seahorn, San  
Diego, CA 92130 (US).(74) Agents: MAXWELL, Lawrence, D. et al.; Brown, Martin,  
Haller & McClain, 1160 Union Street, San Diego, CA  
92101-2926 (US).

(81) Designated States: CN, DE, GB, JP, KR.


Published

With international search report.

(54) Title: FASTENING TOOL AND FASTENER

## (57) Abstract

A fastening tool inserts a self-penetrating fastener (10-18) into workpieces (20, 22) and then sets the fastener (10-18) in a manner similar to a blind riveting tool. The fastener (10-18) has a stem (10), a mandrel (16) connected to the stem (10), and a body (12) surrounding a portion of the stem (10) adjacent the mandrel (16). The body (12) has an enlarged head (14) at the end opposite the mandrel (16). The mandrel (16) has a point (18) for penetrating the workpieces (20, 22). The fastening tool applies a force to the fastener (10-18), causing it to penetrate the workpiece (20, 22). The fastening tool then pulls the stem (10) in a direction away from the workpiece (20, 22), while restraining the body (12) against movement relative to the workpiece (20, 22). The mandrel (16) expands the lower portion of the body (12) radially as it is pulled into contact with the body (12), forming a second or blind head (80) on the side of the workpiece (22) opposite the fastening tool.

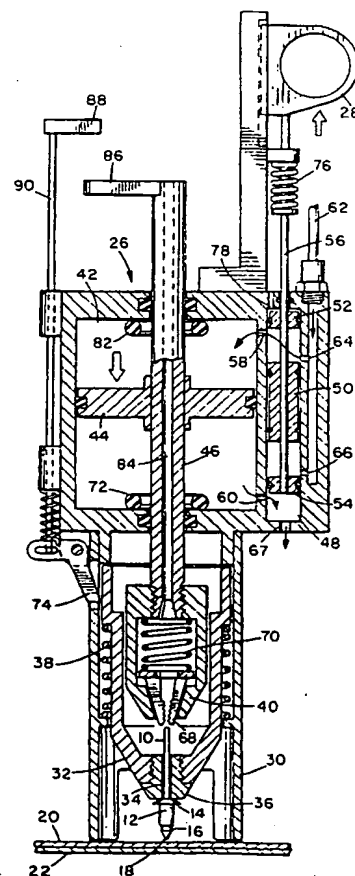

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## FASTENING TOOL AND FASTENER

## BACKGROUND OF THE INVENTION

5       The present invention relates to fastening systems and, more specifically, to a system using a self-penetrating fastener for forming a riveted joint.

10       A nail gun is a well-known fastening tool that injects nails fed from a supply into a structural material such as wood. Nail guns are commonly powered by compressed air or electricity. Using a nail gun, a worker can easily form hundreds of nailed joints per hour.

15       It is often desirable to join structures that are difficult to nail, such as hard materials, fragile materials, or thin sheets of material such as sheet metal. Rivets are commonly used to fasten such materials.

20       Although many types of rivets are known, they can be generally grouped into two categories: pull-type or "blind" rivets, and compression-type or "drive" rivets. The fastener of the present invention is similar to a blind rivet. Blind rivets comprise a rod-shaped stem having an enlarged mandrel frangibly connected to one end and a cylindrical body enclosing a portion of the stem adjacent the mandrel. The body commonly has an enlarged flange or head at the end furthest from the mandrel.

30       To join workpieces using a blind rivet, a hole is drilled through the workpieces. The rivet stem is inserted into the nosepiece of a riveting tool, which firmly grasps the rivet stem. The rivet mandrel is then inserted into the hole through the workpieces so that the cylindrical portion of the body extends completely through the hole and the head rests against one of the workpieces. The riveting tool, restraining the rivet head against motion relative to the workpieces, applies a pulling force to the stem such  
35       that the mandrel, which has a slightly greater diameter

than the inside diameter of the body, is pulled into the body, expanding it radially, and thereby forming an enlarged mushroom-shaped head on the "blind" side of the workpieces. The stem is then broken off from the mandrel  
5 by further pulling and is discarded.

Both portable, hand-held riveting tools and permanently mounted riveting machines suitable for production-line assembly are known. Riveting tools may be powered by compressed air or electricity.

10 Although riveting can form strong joints, it is a relatively slow and labor-intensive fastening method because a hole must be drilled through the workpieces before each rivet is installed. Prior art riveting methods therefore require two tools: a drill and a riveting tool.  
15 Although using two tools in an alternating fashion is inconvenient, inefficient, and uneconomical in any assembly situation, these problems are especially evident in situations where hand-held tools are used, such as in the construction industry. A worker must carry both the drill  
20 and the riveting tool as he works along large sections of metal sheathing or ductwork. Each time the worker moves to a new position, he must pick up the drill, drill a hole, put the drill down, pick up the riveting tool, install the rivet, and put the riveting tool down. Repeatedly  
25 performing these steps is tedious, tiring, and inefficient. These problems and deficiencies are clearly felt in the art and are solved by the present invention in the manner described below.

### 30 SUMMARY OF THE INVENTION

The present invention comprises a fastening tool that inserts a self-penetrating fastener into one or more workpieces to be fastened and then installs the fastener in  
35 a manner similar to a blind riveting tool. The fastener has a stem, a mandrel connected to the stem by a frangible

link, and a body surrounding a portion of the stem adjacent the mandrel. The body has an enlarged flange or head at the end opposite the mandrel. The mandrel has a point for penetrating the workpieces. With the exception of the point, the fastener may have any suitable shape and may resemble any known type of blind rivet.

The fastener is oriented in a direction relative to the workpieces such that the mandrel point is adjacent to the workpieces and the stem is normal to the workpieces. A force is then applied to the fastener in a direction toward the workpieces, which are penetrated by the point. Alternatively, or in addition, a rotary force may be applied to the fastener to penetrate the workpieces in a drill-like manner. The point may have any suitable nail-like or drill-like shape to facilitate penetration and may be made of any suitable material.

When the fastener has completely penetrated the workpieces and the head of the body is adjacent one of the workpieces, the stem is pulled in a direction away from the workpieces while the body is restrained against movement relative to the workpieces. The mandrel, being slightly wider than the inside diameter of the body, expands the lower portion of the body radially as it is pulled into contact with the body. The expanded portion of the body thus forms a second or blind head on the side of the workpieces opposite the fastening tool.

When the blind head has been formed, the resistance of the mandrel to further pulling breaks the frangible link between the stem and the mandrel. The broken stem may then be ejected and discarded.

The fastening tool has a nosepiece that receives the stem of the fastener. Fasteners may be inserted into the nosepiece manually or by a suitable automatic feeding mechanism. Upon actuation, the fastening tool sequentially exerts penetration and pulling forces on the fastener, as described above. The fastening tool may generate the

forces using pneumatic, hydraulic, electrical, or other suitable actuators. Alternatively, the human operator of the fastening tool may supply the forces, either directly or via a force-amplifying mechanism such as a lever that the operator squeezes.

The fastening tool and fastener of the present invention may be used to fasten workpieces oriented in any direction. Furthermore, the fastening tool and fastener of the present invention may be used to fasten any number of workpieces if the length of the fastener body is at least as great as the combined thicknesses of the workpieces. The workpiece or workpieces may be of any shape and may be made of any material that is commonly fastened by riveting.

The foregoing, together with other features and advantages of the present invention, will become more apparent when referring to the following specification, claims, and accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is now made to the following detailed description of the embodiments illustrated in the accompanying drawings, wherein:

Figure 1 illustrates a typical self-penetrating fastener;

Figure 2 is an enlarged side elevation view showing the fastener being driven through a structure;

Figure 3 is a similar view showing the setting of the fastener;

Figure 4 is a front end view of a tool for installing the fastener;

Figure 5 is a sectional view taken along line 5-5 of Fig. 4 showing the fastening tool at the start of a fastener penetration stroke;

Figure 6 is a similar sectional view showing the fastener driven through a structure;

Figure 7 is a reduced side elevation view of the fastening tool with a typical hand grip attached; and

5        Figure 8 is a view similar to Fig. 6, showing the fastening tool at the end of the stem pulling stroke and showing the installed fastener.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

10

In Fig. 1, a self-penetrating fastener comprises a stem 10, a body 12 having a head 14, and a mandrel 16 having a nail-like point 18. The point may have any suitable shape and may be made of any suitable material, such as hardened steel. The fastener may be used to join two workpieces 20 and 22, shown in Figs. 2-3.

15

A fastening tool, portions of which are shown in phantom line in Figs. 2-3, receives stem 10 and transmits the penetrating force to the fastener in a direction toward workpieces 20 and 22. The fastening tool applies this penetrating force until point 18 pierces workpieces 20 and 22 and head 14 contacts workpiece 20.

20

The fastening tool, simultaneously gripping stem 10 and restraining body 12 against movement relative to workpieces 20 and 22, applies a force to stem 10 in a direction away from workpieces 20 and 22. The force draws mandrel 16, which is slightly wider than the inside diameter of body 12, into contact with body 12, expanding it and forming a blind head adjacent to workpiece 22. When the blind head has been formed mandrel 16 resists further movement, and the pulling force breaks a frangible link 24 between stem 10 and mandrel 16, as shown in Fig. 3.

25

30

Figs. 5-8 illustrate the operation of the preferred fastening tool in further detail. In Fig. 5, the fastening tool is positioned for fastening workpieces 20 and 22. An actuator assembly 26 provides the penetration and pulling

35

-6-

forces in response to the activation of a trigger 28, as described below. Actuator assembly 26 is connected to a shroud 30. During the installation of a fastener, shroud 30 is pressed firmly against workpiece 20 to enhance  
5 alignment between the fastener and the workpieces.

A nosepiece 32 inside shroud 30 has a bore 34 in its tip 36 for receiving fastener stem 10. Nosepiece 32 slides axially inside shroud 30 and is biased away from workpieces 20 and 22 by a return spring 38.

10 Actuator assembly 26 comprises a drive cylinder 42, a drive piston 44, a drive rod 46, a valve cylinder 48, a central valve piston 50, an upper end valve piston 52, a lower end valve piston 54, and a valve rod 56. Drive cylinder 42 has an upper drive cylinder orifice 58 and a  
15 lower drive cylinder orifice 60 connecting drive cylinder 42 to valve cylinder 48. A compressed air inlet 62 receives compressed air from a supply (not shown) and supplies it to valve cylinder 48 via an upper valve cylinder inlet orifice 64 and a lower valve cylinder inlet  
20 orifice 66. Pistons 44, 50, 52, and 54 may have O-rings for enhancing sealing.

When trigger 28 is pulled in the direction of the arrow in Fig. 5, compressed air enters valve cylinder 48 at upper valve cylinder inlet orifice 64 and exits valve  
25 cylinder 48 at upper drive cylinder orifice 58. The compressed air exerts a downward force on drive piston 44, which is transmitted to pulling head 40 via drive rod 46. The air below drive piston 44 exits drive cylinder 42 at lower drive cylinder orifice 60 and, in turn, exits valve  
30 cylinder 48 at a lower valve cylinder outlet orifice 67. Pulling head 40 moves downward and contacts nosepiece 32, urging it downward.

Pulling head 40 has means for frictionally gripping fastener stem 10, such as jaws 68. Jaws 68 are disposed in  
35 a frusto-conical recess in the end of pulling head 40. As

jaws 68 descend, stem 10 enters between jaws 68. A pulling head spring 70 biases jaws 68 toward stem 10.

5 In Fig. 6, the downward force on nosepiece 32 presses fastener point 18 against workpiece 20, piercing it and workpiece 22. The downward travel of nosepiece 32 is stopped when drive piston 44 contacts a lower drive cylinder cushioning O-ring 72. Fastener head 14 is pressed firmly against workpiece 20. A spring-biased arm 74 latches nosepiece 32 in this position.

10 When trigger 28 is released, trigger spring 76 relaxes to urge valve rod 56 and valve pistons 50, 52, and 54 to the positions shown in Fig. 8. Compressed air enters valve cylinder 48 at lower valve cylinder inlet orifice 66 and exits valve cylinder 48 at lower drive cylinder orifice 60.  
15 The compressed air exerts an upward force on drive piston 44, which is transmitted to pulling head 40 via drive rod 46. The air above drive piston 44 exits drive cylinder 42 at upper drive cylinder orifice 58 and, in turn, exits valve cylinder 48 at an upper valve cylinder outlet orifice  
20 78.

As pulling head 40 moves upward, jaws 68 are wedged together by the frusto-conical recess and tightly grip fastener stem 10. The upward motion of fastener stem 10 draws fastener mandrel 16 into contact with fastener body  
25 12, as described above, and forms a blind head 80. As pulling head 40 moves further upward, fastener stem 10 breaks off because the remainder of the fastener is restrained against movement by nosepiece 32, which is latched in place. The upward travel of pulling head 40 is  
30 stopped when drive piston 44 contacts an upper drive cylinder cushioning O-ring 82. Although cushioned by O-ring 82, the impact is sufficient to unwedge jaws 68 slightly, thereby releasing their grip on fastener stem 10. Once fastener stem 10 is released, its momentum propels it  
35 through a bore 84 in drive rod 46 where it is ejected from the fastening tool.

Spring-biased arm 74 is released when drive piston 44 and pulling head 40 reach their uppermost positions. A drive rod arm 86 on the upper end of drive rod 46 contacts a latch release arm 88 on the end of a pushrod 90, which is  
5 connected to spring-biased arm 74. The movement of spring-biased arm 74 unlatches nosepiece 32, and return spring 38 urges nosepiece 32 upward to the position shown in Fig. 5. A new fastener may then be inserted into nosepiece 32 and the sequence repeated.

10 Although the operation of the fastening tool is described above with respect to workpieces oriented in a horizontal plane, it should be noted that the fastening tool and fastener of the present invention may be used to fasten workpieces oriented in any direction. Furthermore,  
15 although two workpieces are shown for illustrative purposes, the fastening tool and fastener of the present invention may be used to fasten any number of workpieces if the length of the fastener body is at least as great as the combined width of the workpieces.

20 As shown in Fig. 7, the fastening tool may be enclosed in a suitable housing, and may include a hand grip 92 for facilitating use of trigger 28 by an operator (not shown). However, in other embodiments actuator assembly 26 may be controlled electronically or electromechanically rather  
25 than by a manually operated trigger.

Obviously, other embodiments and modifications of the present invention will occur readily to those of ordinary skill in the art in view of these teachings. Therefore, this invention is to be limited only by the following  
30 claims, which include all such other embodiments and modifications when viewed in conjunction with the above specification and accompanying drawings.

## CLAIMS

1. A fastening apparatus for installing in a workpiece a fastener having a fastener stem and a fastener body surrounding a portion of said fastener stem, comprising:

a nosepiece having a first end for contacting said fastener body, a second end, and a hollow bore between said first and second ends for receiving said fastener stem;

a pulling head axially movable with respect to said nosepiece having grip means for frictionally engaging said fastener stem and retaining said fastener stem; and

an actuator for applying a penetrating force to said nosepiece until said fastener body has penetrated said workpiece, for urging said grip means into frictional engagement with said fastener stem, and for applying a pulling force to said grip means in a direction away from said workpiece while said nosepiece restrains said fastener body against movement relative to said workpiece.

2. The fastening apparatus described in Claim 1, wherein said penetrating force has a direction toward said workpiece.

3. The fastening apparatus described in Claim 2, wherein: said nosepiece has a hollow cylindrical portion; and said pulling head is disposed within said hollow cylindrical portion of said nosepiece.

4. The fastening apparatus described in Claim 3, wherein said pulling head moves in a direction toward said workpiece and contacts said second end of said nosepiece for urging said nosepiece toward said workpiece in response to said penetrating force.

5. The fastening apparatus described in Claim 2, wherein said actuator comprises:

a drive cylinder having first and second drive cylinder orifices;

a drive rod axially movable relative to said drive cylinder; and

a drive piston disposed in said drive cylinder and connected to said drive rod between said drive cylinder orifices.

6. The fastening apparatus described in Claim 5, wherein said actuator further comprises:

a valve cylinder having a first valve cylinder orifice in pneumatic communication with said first drive cylinder orifice, a second valve cylinder orifice in pneumatic communication with said second drive cylinder orifice, third and fourth valve cylinder orifices for receiving pressurized air, and fifth and sixth valve cylinder orifices for releasing air from said valve cylinder;

a valve rod axially movable relative to said valve cylinder; and

first and second valve end pistons disposed in said valve cylinder and attached to said valve rod;

a central valve piston disposed in said valve cylinder and attached to said valve rod between and spaced from said first and second valve end pistons;

said first and third valve cylinder orifices are in pneumatic communication and said second and sixth valve cylinder orifices are in pneumatic communication when said valve rod is in a first position; and

said second and fourth valve cylinder orifices are in pneumatic communication and said first and fifth valve cylinder orifices are in pneumatic communication when said valve rod is in a second position.

7. The fastening apparatus described in Claim 6, wherein said actuator further comprises a manually operated trigger

connected to said valve rod for moving said valve rod  
4 between said first and second positions.

8. The fastening apparatus described in Claim 2, wherein  
2 said grip means comprises jaws.

9. The fastening apparatus described in Claim 8, wherein  
2 said pulling head has a frusto-conical opening, and said of  
jaws are disposed in said opening.

10. The fastening apparatus described in Claim 9, wherein  
2 said jaws release said fastener stem after said fastener  
has been installed in said workpiece.

11. The fastening apparatus described in Claim 10, wherein  
2 said drive shaft has a longitudinal bore for passing said  
released fastener stem therethrough.

12. The fastening apparatus described in Claim 5, wherein  
2 said drive rod is connected to said pulling head.

13. The fastening apparatus described in Claim 12, further  
2 comprising a shroud connected in rigid relation to said  
drive cylinder and partially enclosing said nosepiece, said  
4 shroud having an end for placing in contact with said  
workpiece.

14. The fastening apparatus described in Claim 13, further  
2 comprising a nosepiece return spring between said shroud  
and said nosepiece for biasing said nosepiece away from  
4 said workpiece.

15. The fastening apparatus described in Claim 14, further  
2 comprising a latch rigidly mounted with respect to said  
actuator for preventing said nosepiece from moving in a

4 direction away from said workpiece until after said  
fastener has been installed in said workpiece.

16. The fastening apparatus described in Claim 15, wherein  
2 a portion of said drive shaft contacts a portion of said  
latch for releasing said latch when said grip means has  
4 moved away from said workpiece to a retracted position.

17. A method for installing a fastener in a workpiece,  
2 said fastener having a pointed mandrel, a stem frangibly  
connected to said mandrel, and a body surrounding a portion  
4 of said stem adjacent said mandrel, comprising the steps  
of:

6 urging said pointed mandrel in a direction toward said  
workpiece and into said workpiece until said body extends  
8 through said workpiece;

gripping said stem; and

10 pulling said stem in a direction away from said  
workpiece while restraining said body against movement  
12 relative to said workpiece until said mandrel contacts a  
portion of said body and expands said portion.

18. The method for installing a fastener in a workpiece  
2 described in Claim 17, further comprising the step of  
pulling said stem in a direction away from said workpiece  
4 until said stem breaks off from said mandrel.

19. A fastener, comprising:

2 a mandrel having a point for penetrating a workpiece;

a stem frangibly connected to said mandrel; and

4 a body surrounding a portion of said stem adjacent  
said mandrel.

20. The fastener described in Claim 19, wherein said point  
2 has a nail-like shape for piercing said workpiece.

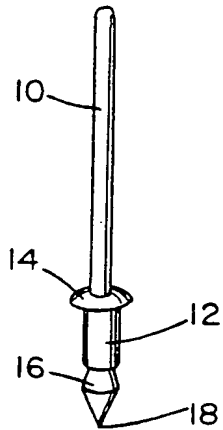


FIG. 1

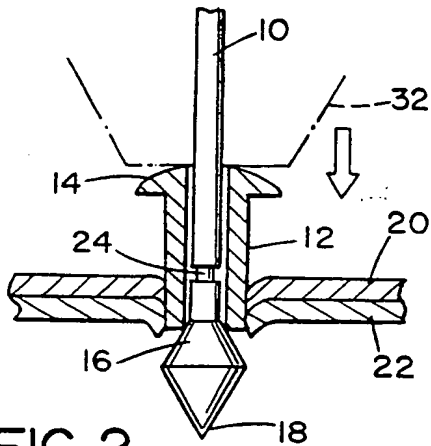


FIG. 2

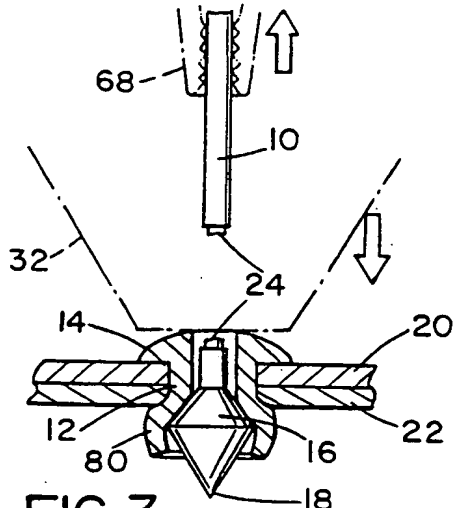


FIG. 3

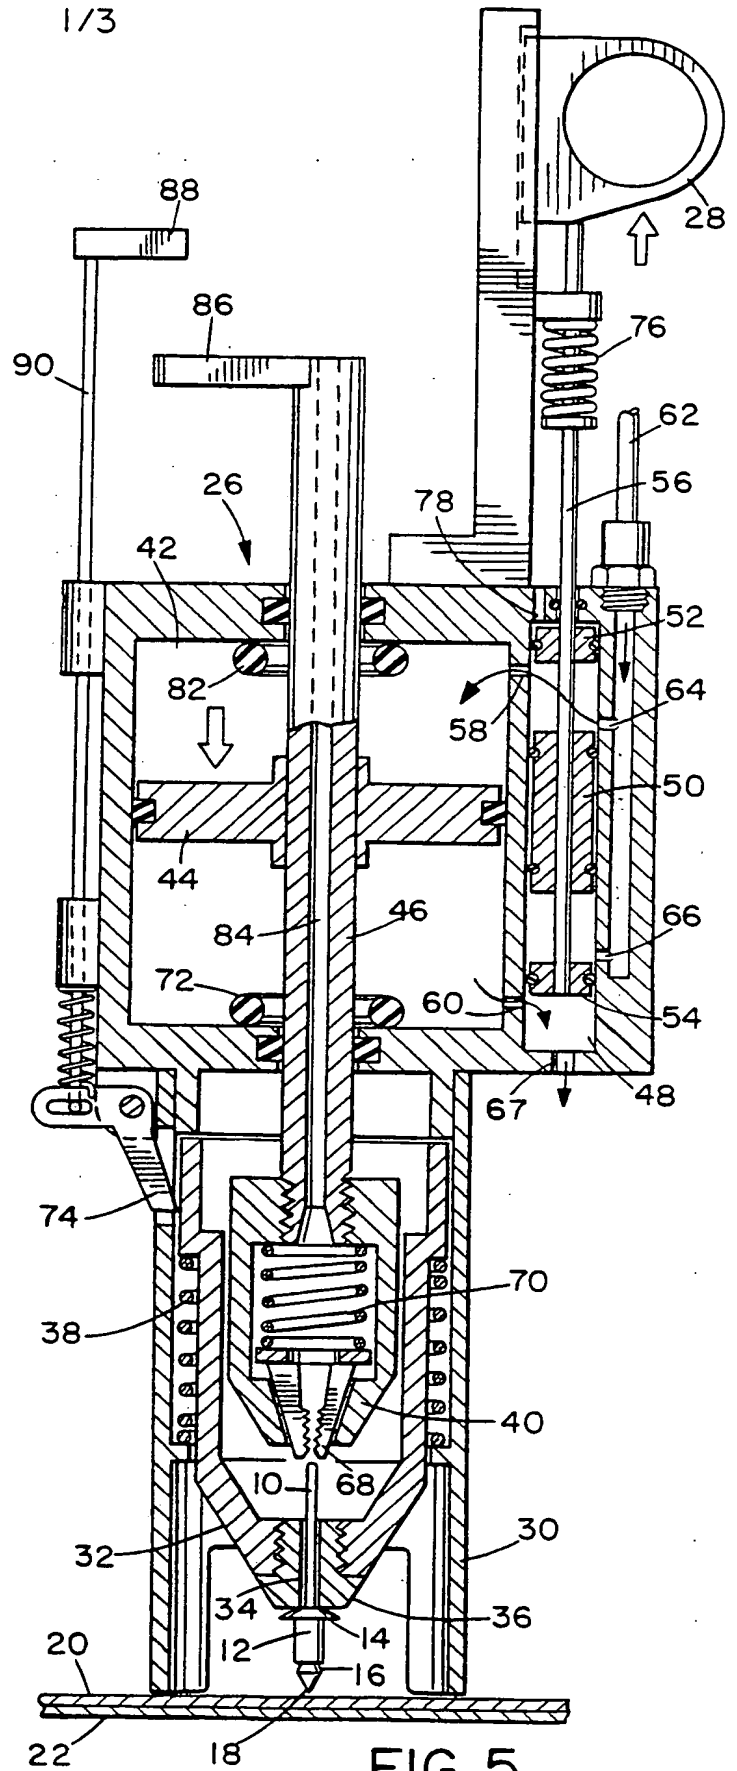


FIG. 5

2/3

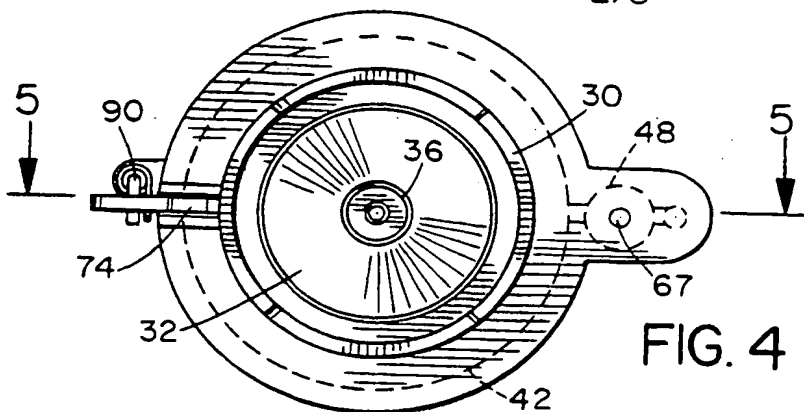


FIG. 4


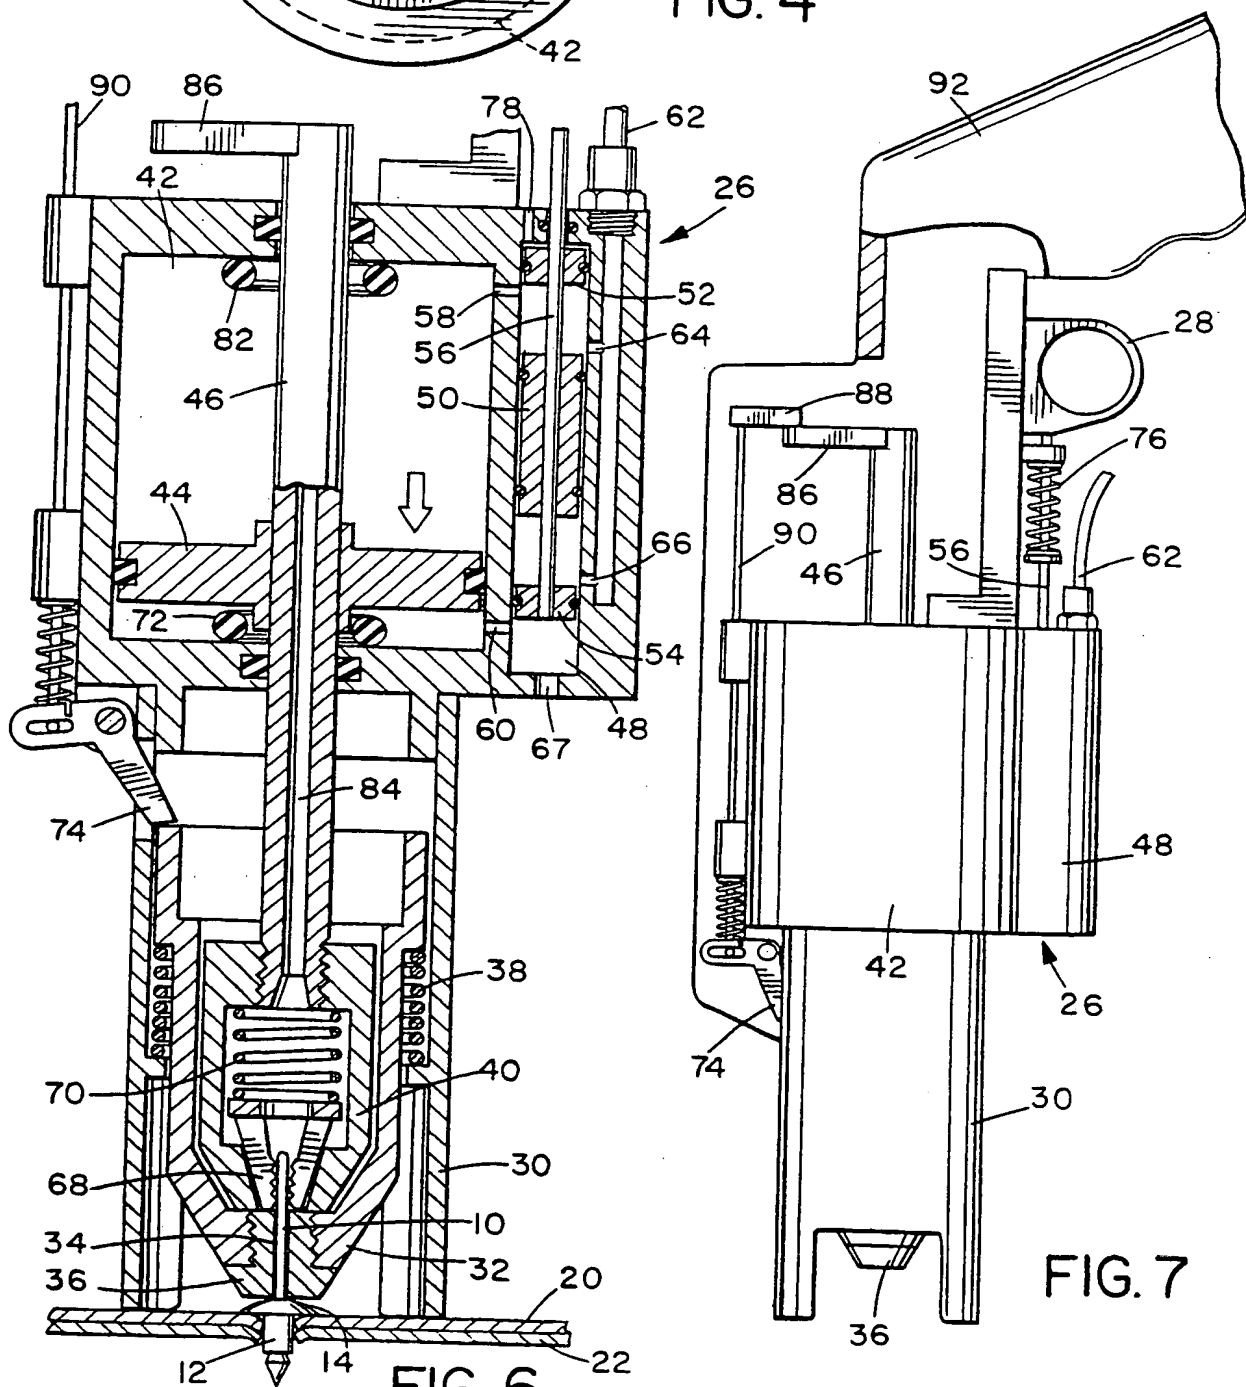


FIG. 6

FIG. 7

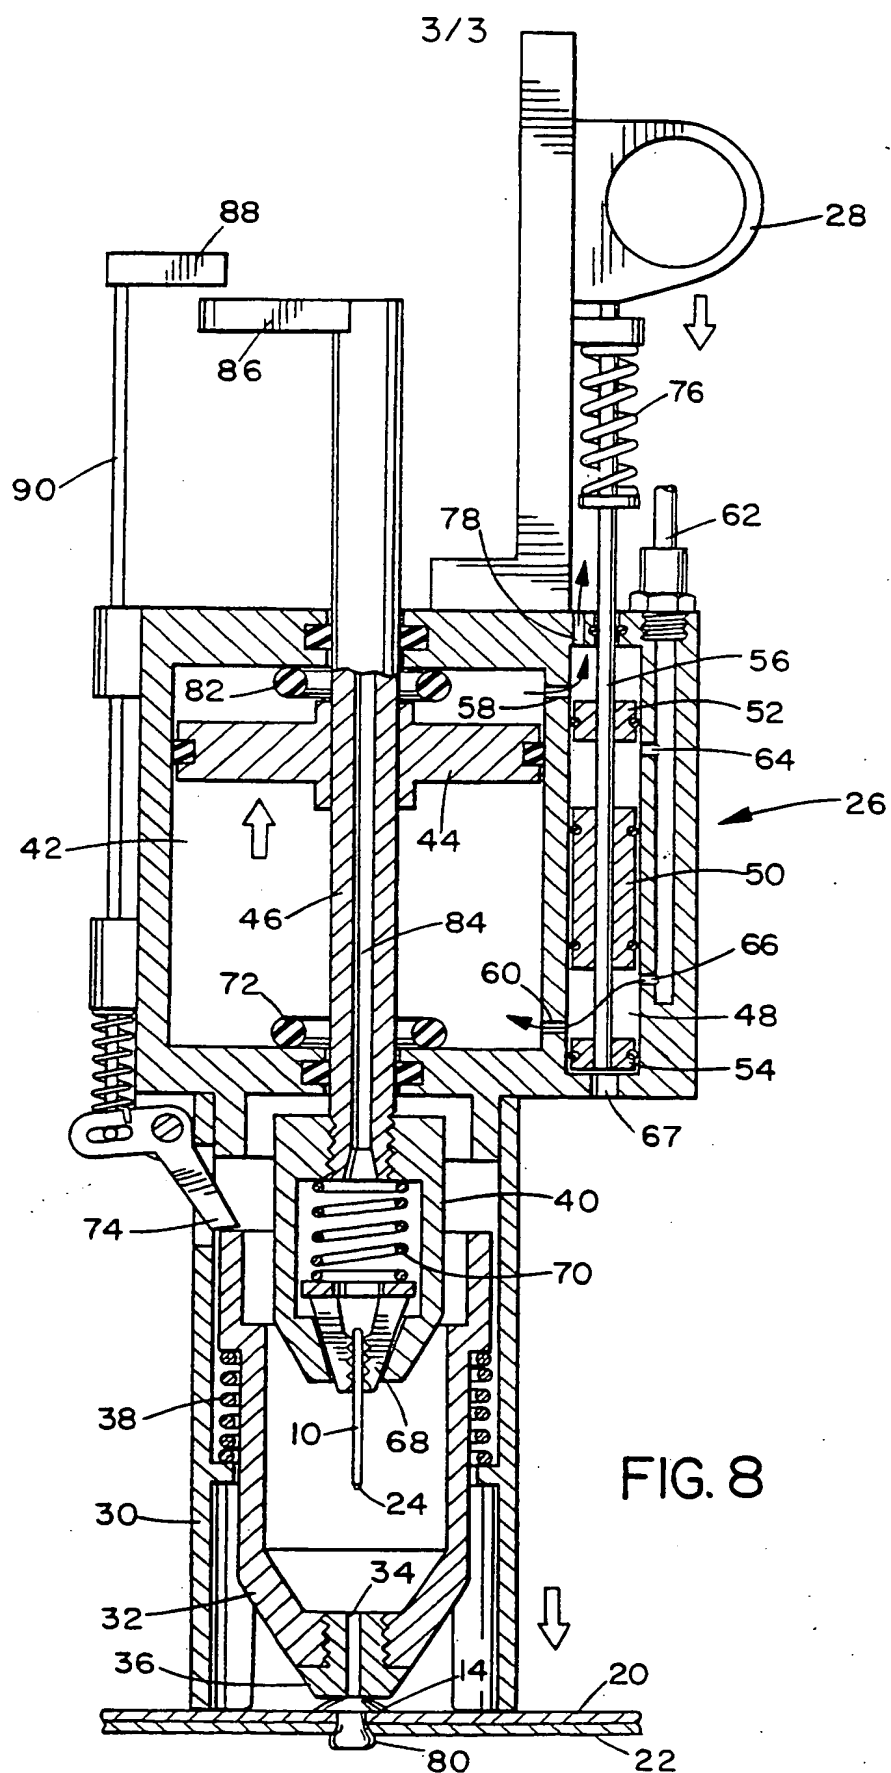

## INTERNATIONAL SEARCH REPORT

Patent Application No

PCT/US 94/09094

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 6 B21J15/04 B21J15/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B21J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,1 128 442 (G.K.N SCREWS & FASTENERS LTD.) 25 September 1968	1-5, 8-10, 12, 17-20
A	see the whole document ---	6, 7
A	EP,A,0 351 715 (HILTI AG) 24 January 1990 see abstract; figures ---	1-4, 13, 14, 17-20
A	DE,A,23 34 385 (HESTERMANN) 23 January 1975 see claim 1; figures -----	1-4, 17-20

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

\* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* "&" document member of the same patent family

Date of the actual completion of the international search

16 November 1994

Date of mailing of the international search report

01.12.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+ 31-70) 340-3016

Authorized officer

Barrow, J

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/09094

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-1128442		NONE	
EP-A-0351715	24-01-90	DE-A- 3824817	25-01-90
DE-A-2334385	23-01-75	NONE	

**THIS PAGE BLANK (USPTO)**